

Nuheat 9mm Plug-in Heating Cable


For Pipe Freeze Protection

Nuheat plug-in self-regulating heating cables are designed for residential and commercial (non-hazardous) pipe freeze protection. Suitable for both metal or plastic pipes, Nuheat plug-in self-regulating heating cables can accommodate pipes up to 6 inches in diameter*.


Factory assembled with a standard three-prong plug, each cable can simply connect to any grounded 120V receptacle. Installation is easy, as the cable's self-regulating feature allows the heating cable to be overlapped on itself without risk of overheating and/or burnout.

*pipes larger than 2" require 1" insulation

PLUG-IN SELF-REGULATING HEAT CABLE (insulation required but not shown)

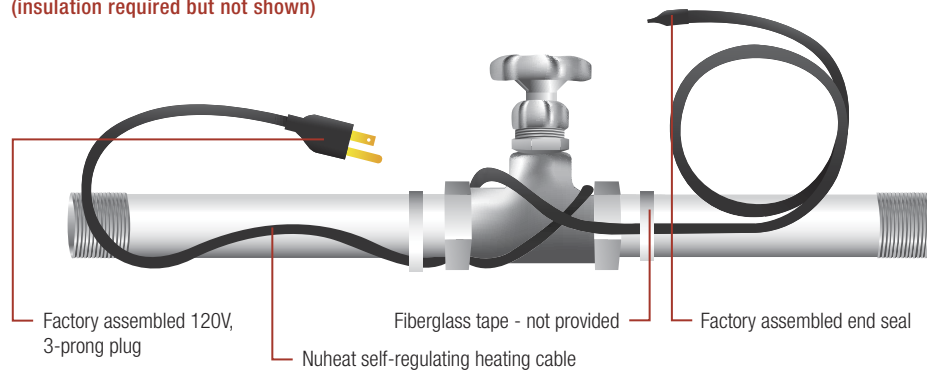


POWER OUTPUT CURVE

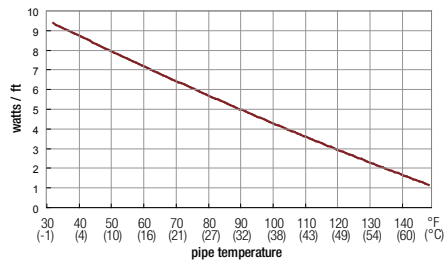

The Power Output Curve illustrates the relationship between wattage output and pipe temperature. As the pipe temperature rises, the heating cable uses less wattage and emits less heat.

MODEL NUMBER CONVENTION

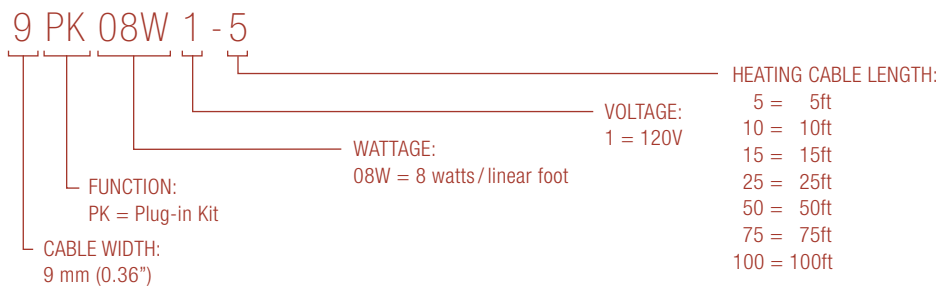

GROUND-FAULT PROTECTION

Nuheat Industries and National Electrical Codes require 30-mA equipment ground-fault protection on each heating cable branch circuit to reduce the danger of fire caused by continuous electrical arcing resulting from improper installation or damage to the heating cable. Conventional circuit protection may not be suitable for preventing electrical arcing.

9mm SELF-REGULATING HEATING CABLE

MODEL NUMBERS

5 ft	9PK08W1-5
10 ft	9PK08W1-10
15 ft	9PK08W1-15
25 ft	9PK08W1-25
50 ft	9PK08W1-50
75 ft	9PK08W1-75
100 ft	9PK08W1-100

If pipe length is in between sizes, use next largest size; excess cable can be looped back along pipe.

PIPE MATERIAL

Suitable for metal or plastic pipes

OUTPUT PER FOOT @ 50°F (on metal pipes)

8 watts

VOLTAGE

120V

CABLE DIMENSIONS

0.36 inches x 0.22 inches
(9.1mm x 5.6mm)

MINIMUM BEND RADIUS

1.18 inches (30mm)

MAXIMUM EXPOSURE TEMP.

150°F (66°C)

WARRANTY

10 years*

CLASSIFICATION

Non-hazardous locations

* available when online warranty card completed within 30 days of installation